

LANMF61850

Installation Instructions

Mud Flaps for 6xxR JD Sprayers with Narrow Fenders (KK61850)

(1 Pair)

LANKOTA[®]


270 West Park Avenue

Huron, SD 57350

866-526-5682

Numerical Parts List

Part Numbers	Description	Qty
LANMF28	Sprayer Mud Flap Mount	2
LANMF12	Mud Flap Clamp Plate	2
LANMF13	Sprayer Mud Flap (19x24)	2
LANMF26	Anti-Tear Out Washer	4
LANMFBH1	5/16" Mud Flap Bag of Hardware	2
LANF05SP	5/16" Stainless Flat Washer	10
LANFH8NC	5/16" Stainless Top Lock Nut	6
LANF06F3	5/16" x 1" Stainless Hex Bolt	6

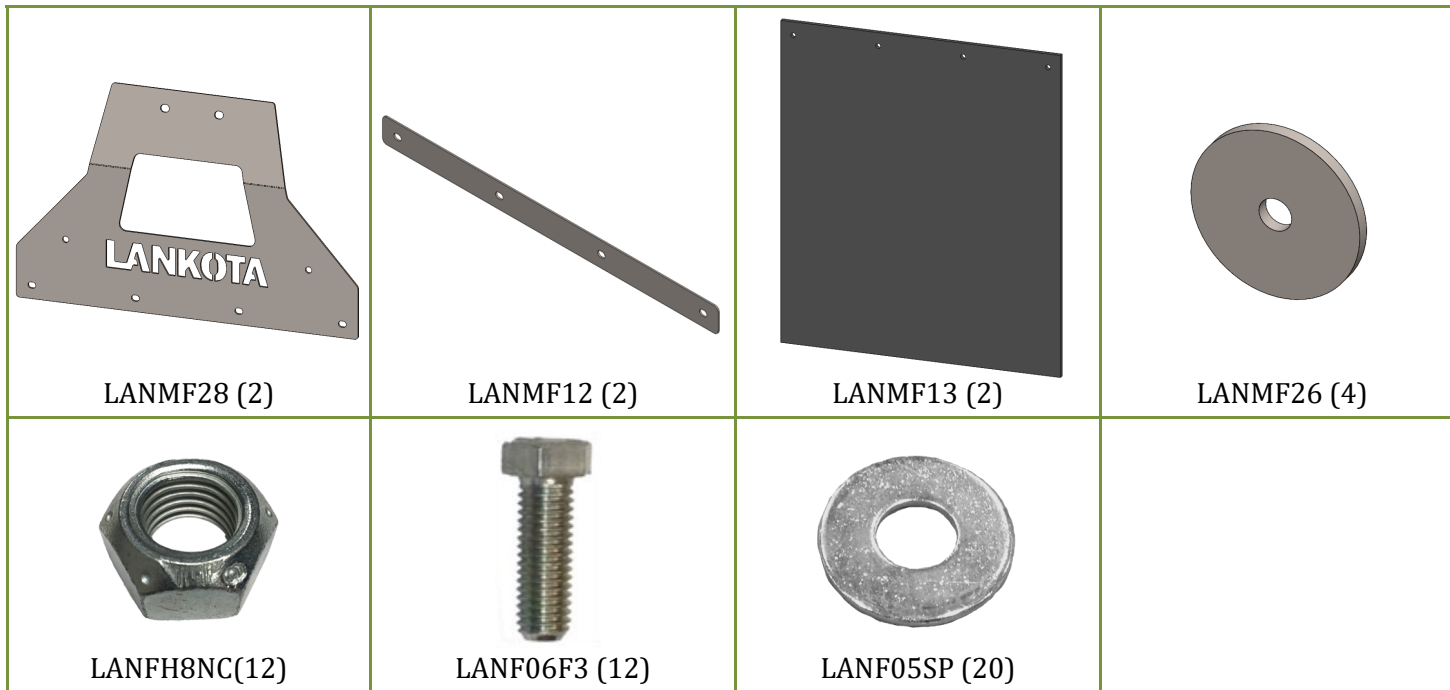

Kit Installation



Figure 1



Figure 2



Figure 3

Figure 4



Refer to Figures 1 - 4

1. Remove the hardware and marker plate from the rear mount point of the fender.
2. Slide the original hardware through the marker, mud flap mount (LANMF28), fender, backing plate and the fender bracket.
3. Mount the mud flap (LANMF13) to the mount with the 5/16" hardware and clamp plate (LANMF12).

Kit Installation



Figure 5

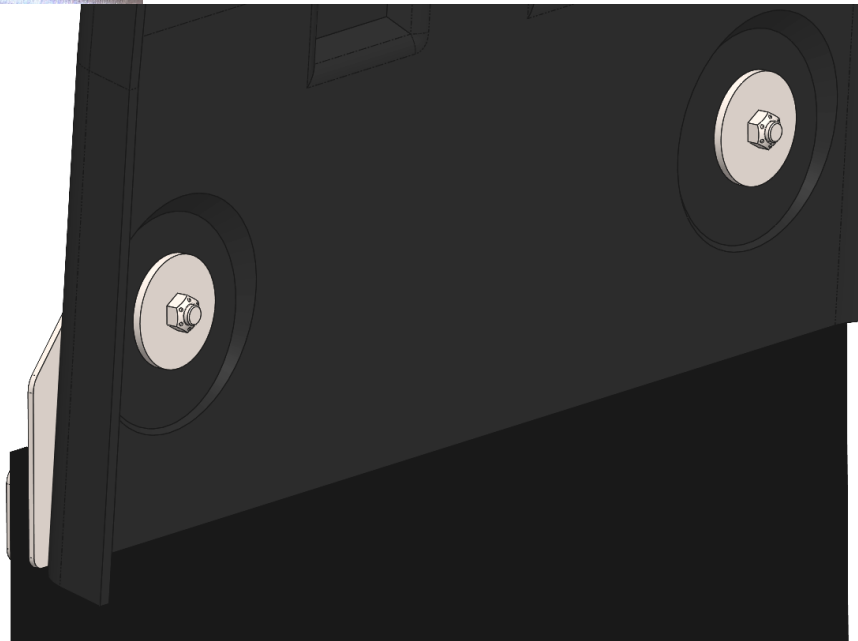


Figure 6

Refer to Figures 5 & 6

4. Using a 11/32" drill bit, through the shown holes, drill holes in the fender.
5. Push a 5/16" bolt and washer through the holes.
6. Secure them in place with an anti-tear out washer (LANMF26) and a 5/16" top lock nut.
7. Tighten all hardware.
8. Repeat on other wheel.



WARRANTY STATEMENT

Lankota Warranty only covers products produced by LANKOTA and does not cover parts made and/or sold by other aftermarket manufacturers, or the original manufacturer, or that were part of the original equipment's construction.